

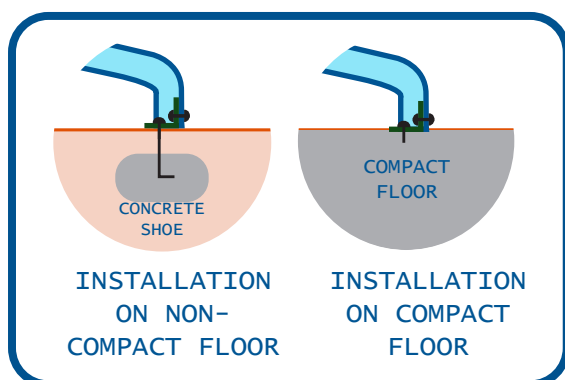


DOUBLE TRACK

Installation

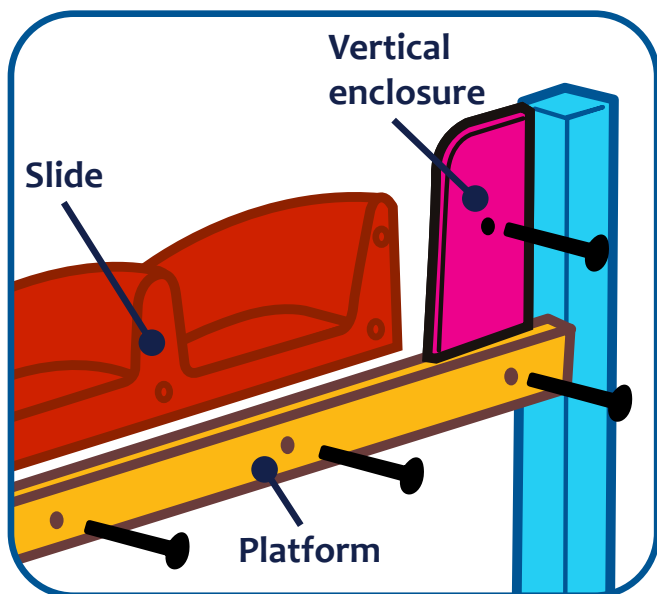

Double slide track slide. It does not have a initial section, since the platform itself can perform this function. Manufactured in one piece. Rounded edges, no sharp edges.

Designed according to the requirements of the EN1176 standard. Made of GRP. (Brackets and hardware NOT included)

AVAILABLE COLORS:

GRAY
RAL7040

LIGHT
GREEN
RAL 6018

DARK
GREEN
RAL 6029

RED
RAL 3020

BLUE
RAL 5015

YELLOW
RAL 1018

PURPLE
RAL 4005

ORANGE
RAL 2009






Molder Disnova Composites
www.molderdisnova.com

COMPOSITE

DOUBLE TRACK

Safety distances according to the requirements of the EN1176 standard

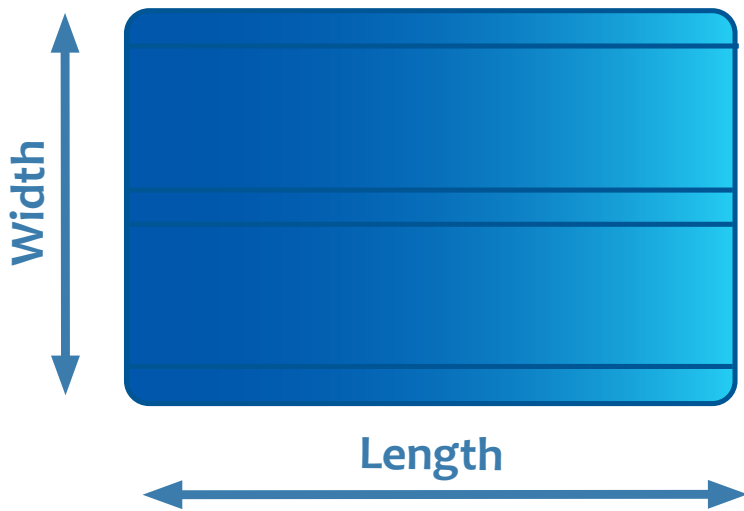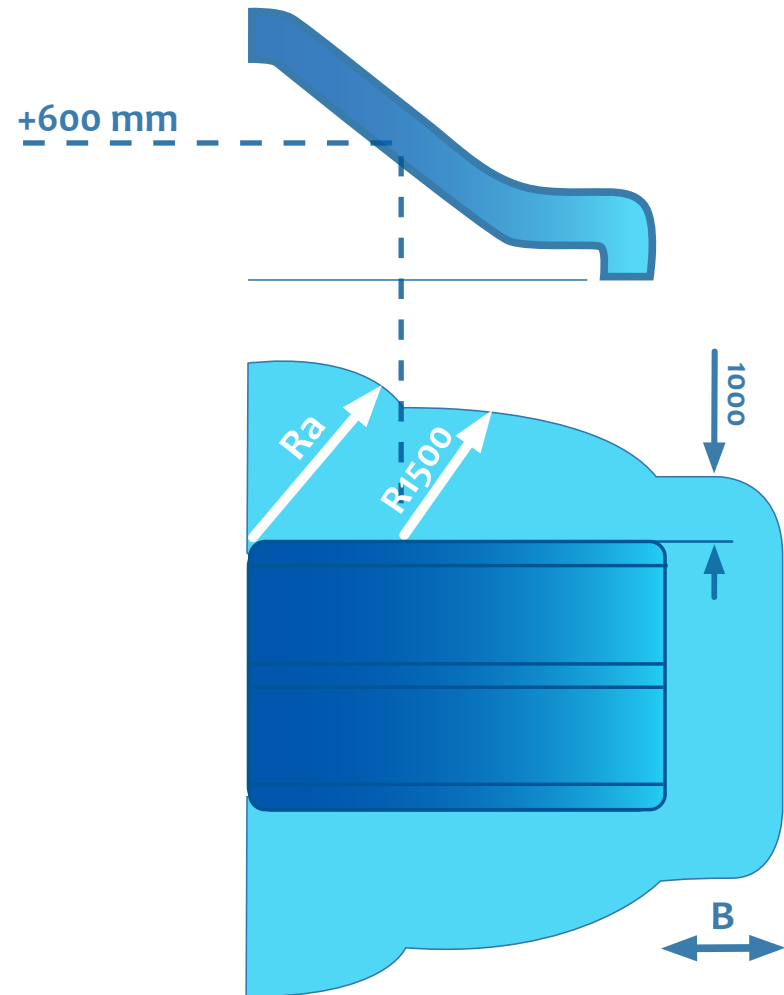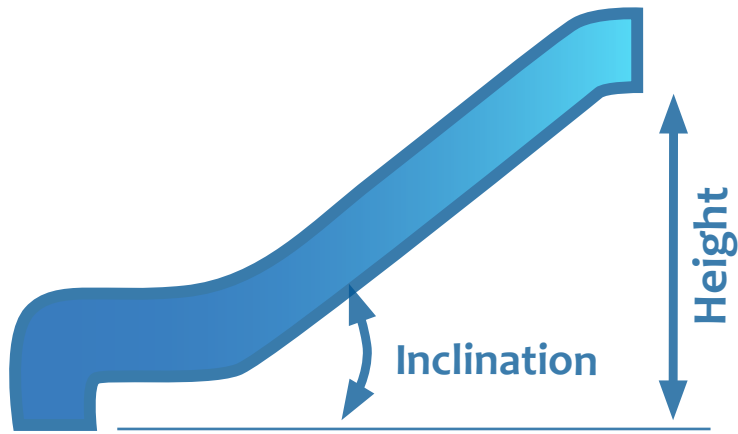


	Height	Length	Width	Inclination	Ra	B
DP80	800	1.625	1.100	36°	1.500	1.000
DP90	900	1.625	1.100	36°	1.500	1.000

Dimensions in mm.



DOUBLE TRACK

2 DIFFERENT MODELS

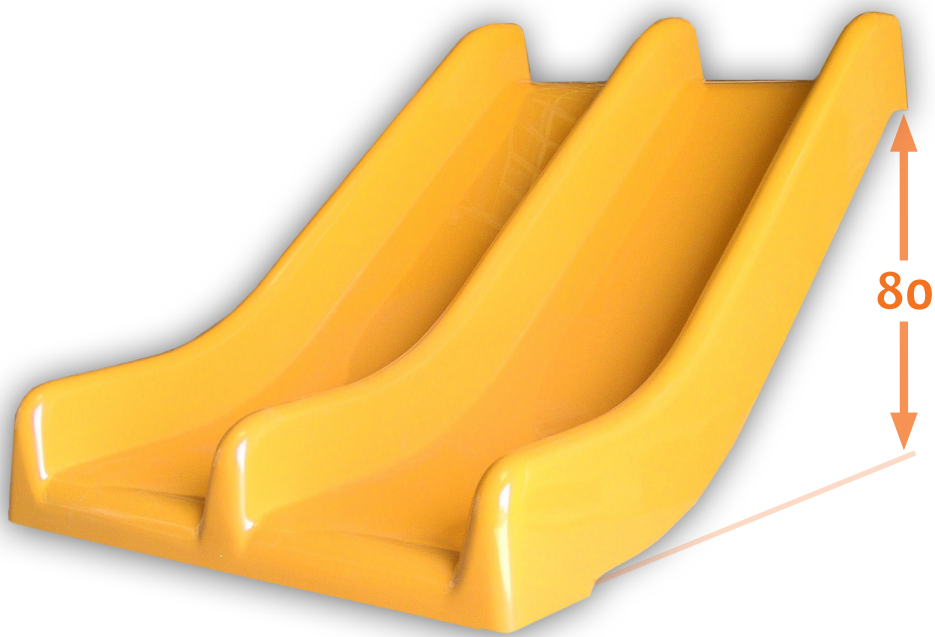

DP 80



DP 90

